



# Alpine Range

## Energy efficient and small footprint for compact spaces

Providing a constant stream of fresh, filtered chilled, sparkling or ambient water, the Billi Alpine range offers premium filtration, easy installation and lower power consumption.

### Features and benefits



#### Eco-Intelligence technology

The high-performance tank features superior insulation to keep the water cold ensuring less energy is used during the chilling process. In addition, the Alpine 125 model includes a Standby Mode whereby after a set period on non-usage the unit will power down to prevent excess energy consumption.



#### Adjustable chilled temperature

A simple adjustable control knob allows the chilled water temperature to be raised to 15°C or lowered to 6°C for perfectly chilled, refreshing drinks, with your required temperature being quickly reached and maintained.



#### Ice bank cooling technology

Billi's Ice bank technology has a chilled reservoir where both sparkling and chilled water supply passes through. In doing so, the dispensed water temperature is consistently chilled, also providing a higher level of carbonation.



#### Chilled and Ambient option

The Billi Alpine 125 dispenses chilled and ambient through the Billi dual temp dispenser for an endless supply of filtered water. The Billi Alpine models will continue dispensing ambient filtered water after the chilled tank is fully drawn.



#### Sparkling and Chilled option

The CO<sub>2</sub> injection system ensures the saturation of CO<sub>2</sub> in the water is high which means it has a better life and, consequently, taste. Adjust the level of sparkling to suit your taste with adjustable controls up to 5 bar of CO<sub>2</sub> pressure. Packaging includes CO<sub>2</sub> canister.



### Water options

Option	Boiling	Chilled	Sparkling	Ambient
Alpine				
Alpine Sparkling				

### Configuration

The Billi Alpine models do not require cupboard ventilation grilles and fans.

With dimensions of just 340mm high by 460mm deep, this under bench unit is designed to maximise available space under the sink.

## Technical specifications

Model	Suggested number of people	Boiling water delivery cups per hour	Current draw amps	Height (mm)	Width (mm)	Depth (mm)
Alpine 060 XL Chrome	Up to 12	60	10	340	180	460
Alpine 120 XL Chrome	Up to 25	120	10	340	180	460
Alpine 125 XL Chrome	Up to 40	120	10	340	180	460

1 cup = 170 ml.


## Compatible dispensers

Billi Alpine 060 and 120 available with an optional square profile slimline dispenser.

Billi Alpine 125 is available in any of the dual temp dispenser styles & finishes.

## Installation

With a focus on space saving, Billi units are often less than half the size of comparative products. This allows for the most economical use of under-counter space.

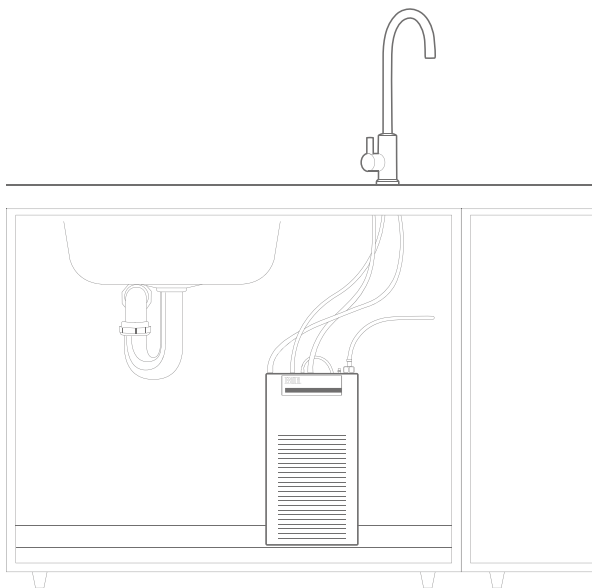

Typical installation set-up - the image is for illustrative purposes only.



125 XL Levered Dispenser

060 & 120 Round Slimline

060 & 120 Square Slimline



Alpine under-counter



70mm riser and font\*

\* Optional matching riser and font accessories available for XL Levered Dispenser only.

## Connect with us



@billiwaterinternational

W: [www.billiwater.com](http://www.billiwater.com)

## Tested and certified



Billi Australia Pty Ltd reserves the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Firewall and the Firewall logo are trademarks of Waterlogic International Limited (WLI) in countries where the Group operates. WLI Trading Ltd licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.